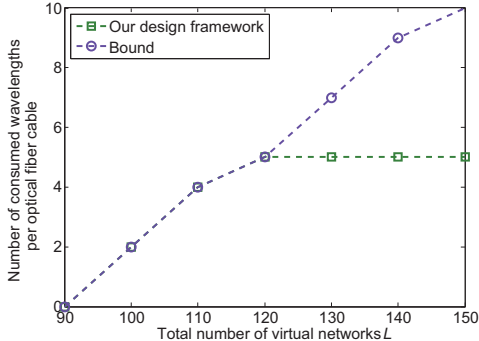
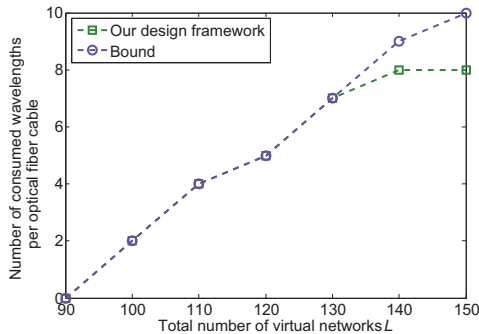
(a) $SC_h = 15$ (b) $SC_h = 20$ (c) $SC_h = 25$

Figure 8: Number of wavelengths per optical fiber cable vs. total number of virtual networks.

framework and the optimal solution with $SC_h = \{15, 20, 25\}$ in Figs. 8(a), 8(b), and 8(c), respectively. The number of wavelengths used by our design framework W becomes larger with an increasing value of L . With $SC_h = 15$ in Fig. 8(a), only when $L = 90$, the converge ratio between W and the optimal solution W_{bound} is 100%. While in Fig. 8(a), the converge ratio decreases if L is larger than 90. This is because that we can not serve more virtual networks due to the limited computing resources of high-level EDs, even using the transformation of virtual networks. However, we can narrow the gap between W and W_{bound} if a higher SC_h is given. Given $SC_h = 20$ in Fig. 8(b), when $L = \{90, 100, 110, 120\}$, the converge ratio is 100%. Given $SC_h = 25$ in Fig. 8(c), when $L = \{90, 100, 110, 120, 130\}$, the converge ratio is always 100%. This demonstrates the optimality of our design framework.

5. CONCLUSION

We proposed a novel design framework to perform the green VNE of collaborative edge computing in environment-friendly optical-wireless networks. Simulation results demonstrated that our design framework could successfully embed more virtual networks compared to the benchmark with an average improvement ratio of 77%, while a blind increase of ED computing capacity could not improve the VNE efficiency; our algorithm showed a good converge ratio between the actual number of wavelengths used per optical fiber link and a theoretical optimal solution, especially with a high initial computing capacity of high-level EDs. Since our solution has a lower transmitting power and consumes fewer wavelengths, the corresponding design complies with the principles of social, economic and ecological sustainability.

6. ACKNOWLEDGMENTS

This work was supported in part by the National Natural Science Foundation of China (Grant Nos. 61401082, 61471109, 61502075, 61672123, 91438110, U1301253), the Fundamental Research Funds for Central Universities (Grant Nos. N161604004, N161608001, N150401002).

7. REFERENCES

- [1] Shao-Yu Lien, Shao-Chou Hung, Hsiang Hsu, and Kwang-Cheng Chen. Collaborative radio access of heterogeneous cloud radio access networks and edge computing networks. In *Communications Workshops (ICC), 2016 IEEE International Conference on*, pages 193–199. IEEE, 2016.
- [2] Xiang Sun and Nirwan Ansari. Edgeiot: Mobile edge computing for the internet of things. *IEEE Communications Magazine*, 54(12):22–29, 2016.
- [3] Ke Zhang, Yuming Mao, Supeng Leng, Quanxin Zhao, Longjiang Li, Xin Peng, Li Pan, Sabita Maharjan, and Yan Zhang. Energy-efficient offloading for mobile edge computing in 5g heterogeneous networks. *IEEE Access*, 4:5896–5907, 2016.
- [4] Bhaskar Prasad Rimal, Dung Pham Van, and Martin Maier. Mobile-edge computing vs. centralized cloud computing in fiber-wireless access networks. In *Computer Communications Workshops (INFOCOM WKSHPS), 2016 IEEE Conference on*, pages 991–996. IEEE, 2016.
- [5] Anna Tzanakaki, Markos P Anastasopoulos, Georgios S Zervas, Bijan Rahimzadeh Rofee, Reza Nejabati, and Dimitra Simeonidou. Virtualization of heterogeneous wireless-optical network and its infrastructures in support of cloud and mobile cloud services. *IEEE Communications Magazine*, 51(8):155–161, 2013.
- [6] Bijan Rahimzadeh Rofee, Georgios Zervas, Yan Yan, Markos Anastasopoulos, Anna Tzanakaki, Shuping Peng, Reza Nejabati, and Dimitra Simeonidou. Hardware virtualized flexible network for wireless data-center optical interconnects [invited]. *Journal of Optical Communications and Networking*, 7(3):A526–A536, 2015.
- [7] Pin Lv, Xudong Wang, and Ming Xu. Virtual access network embedding in wireless mesh networks. *Ad Hoc Networks*, 10(7):1362–1378, 2012.